

150W 5 in 1 LED Controller (WiFi + 2.4G) Instruction Manual

Contents

<u>Product features</u>	2
<u>Set up output mode</u>	3
<u>PUSH Dimming</u>	4
<u>Compatible with remote</u>	4
<u>2.4G RF remote control instruction</u>	5-7
<u>Link / Unlink Instructions</u>	5
<u>Auto transmitting & Synchronization</u>	6
<u>Dynamic mode table selection</u>	6-7
<u>“Do Not Disturb” mode is activated and shut down</u>	8
<u>Smartphone app control instruction</u>	8-9
<u>Alexa voice control instruction</u>	10
<u>Google home voice control instruction</u>	11
<u>DMX512 LED transmitter control instruction</u>	12
<u>Connect to LED strip diagram</u>	13
<u>Attention</u>	14

Product features

This product uses WiFi + Bluetooth + 2.4G wireless transmission technology, low power consumption, strong anti-interference ability. WiFi + Bluetooth connect network can greatly enhance the connect network experience. When the router is disconnected, Bluetooth can also directly connect and control equipment at close range.

After successful network configuration using **[Tuya Smart]** app to achieve wireless dimming, remote control, group control, scene control, timing control, music movement, biorhythm, sleep plan, wake plan, one key execution, automation, etc. functions. And it supports 2.4G remote control.



16 Millions of colors to choose



Color temperature adjustable



Dim brightness / Saturation



2.4G RF wireless transmission technology



WiFi wireless control support long-range control



Auto-transmitting & Synchronization (only for remote control dimming)



Device sharing



Tap-to-Run & automation



Timing setting / countdown turn on / off LED light



DMX512 controllable (Only for RGB+CCT output mode DMX512 LED transmitter is needed)



Remote control Control distance 30m



Smartphone app control



Support third party voice control



Group contro



Biorhythm



Support music rhythm



Sleep / wake up plan



Support scene customization



Do not disturb mode



Waterproof and dustproof grade IP67

Setting Output Mode

Set up correct output mode based on the feature of lights

Method 1: Remote sets output mode (Note: If there is no operation within 10 seconds, it will automatically exit).

- (1) Long press "ON" button or group "I" 10 seconds until light flashes slowly.
- (2) Press group button "I" to switch the corresponding output mode.

 Setting output mode only supports 4 or more than 4 Zones remote

Group Button	Zone 1	Zone 2	Zone 3	Zone 4	Zone 5 / Master ON
Output Mode	Single color	Dual white	RGB	RGBW	RGB+CCT



Method 2: Setting output mode by

Tuya App Need to pair network before setting, please check (9 page) for more details.

- (1) Click on the " Common Functions " of the corresponding device

- (2) Click on " Output Mode "

- (3) Select the corresponding output mode

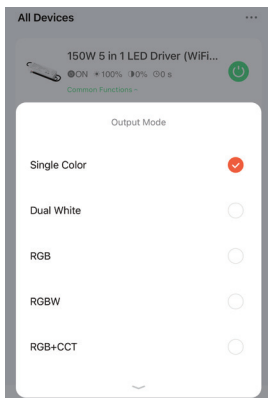


PUSH Dimming

Short press PUSH switch:

Turn ON/OFF light

Long press PUSH switch:

- Stepless dimming brightness.
- Long press and release your finger, then repeat long pressing to increase or decrease brightness.



Compatible with these 2.4G RF remote controls (Purchased separately)



FUT100



FUT089S



FUT089
FUT089-B



FUT088



FUT092
FUT092-B




FUT096
FUT096-B



FUT007




B0 / B0-B



B1 / B1-B / T1



B2 / T2




K1 / K1-B



B3 / B3-B / T3



B8




B4 / B4-B / T4



S1-B / S1-W
S1-G




S2-B / S2-W
S2-G



FUTD01

2.4G RF Remote control instruction


1). Linking Code Instructions



Power off 10 seconds and power on again or turn on light via PUSH switch



Short press " | " button 3 times within 3 seconds.




Lights blink 3 times slowly means linking is done successfully.



Linking failed if light is not blinking slowly, Please follow above steps again. (Note: Light that have linked can't link again)


2). Unlinking Code Instructions



Power off 10 seconds and power on again or turn on light via PUSH switch



Short press " | " button 5 times within 3 seconds.



Lights blink 10 times quickly means unlinking is done successfully.



Unlinking failed if light is not blinking quickly, Please follow above steps again. (Note: Light haven't linked that don't need to unlink)


3). Auto transmitting & Synchronization (only for remote control)

Remote signal auto transmitting

One light can transmit the signals from the remote control to another light within 30m, as long as there is a light within 30m, the remote control distance can be limitless.

Dynamic modes auto synchronization

Multi lights can synchronize if they are in same dynamic mode and linked with same remote (distance between each light is within 30m)

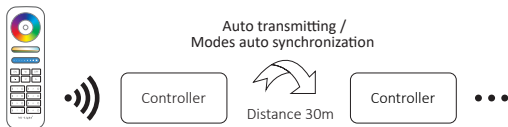

4). Dynamic mode table selection (only for remote control)

Select dynamic mode table 1:

While the light is in static mode, short press “S+” button 5 times quickly until blue light flashes 3 times slowly, static mode is activated successfully.

Select dynamic mode table 2:

While the light is in static mode, short press “S-” button 5 times quickly until yellow light flashes 3 times slowly, static mode is activated successfully.

Dynamic mode table 1 (default)

Number	Dynamic Mode	Brightness / Saturation / Speed
1	Mardi Gras	Adjustable
2	Automatic color change	
3	Sam	
4	Gemstone	
5	Twilight	
6	American	
7	Fat Tuesday	
8	Party	
9	Slow Color Splash	

Dynamic mode table 2 (need to switch manually)

Number	Dynamic Mode	Brightness / Saturation / Speed
1	Seven colors gradual change	Adjustable
2	White light Gradual change	
3	RGB gradual change	
4	Seven colors jump to change	
5	Jump to change randomly	
6	Red light gradual change +Flash 3 times	
7	Green light gradual change +Flash 3 times	
8	Blue light gradual change +Flash 3 times	
9	White light gradual change +Flash 3 times	

5). "Do Not Disturb" mode is activated and shut down (default activated)

Turn on "Do Not Disturb" mode (wide using in the area which have power failure frequently to save energy)

2.4G RF Remote turn on and turn off instruction

Turn on "Do Not Disturb" mode:

Press "OFF" button three times within three seconds and press "ON" button three times, Activated successfully once led light flashes four times quickly.

Attention: Do not disturb mode is activated

1. When the light is OFF status (For example: Use app or remote to turn off light)
The light is OFF status once you turn off power and turn on again.
(User must turn off and turn on power twice times to activate light or use APP / remote to activate light)
2. When the light is ON status
The light is ON status once you turn off and turn on power one time.

Turn off "Do Not Disturb" mode:

Press "ON" button three times within three seconds and press "OFF" button three times, closed successfully once led light flashes four times slowly.

Attention: The light will be always "ON" status if you turn on and turn off power once user closed "Do Not Disturb" mode.

App turn on and off "Do Not Disturb" mode instruction ([check details in page 9](#))

Smartphone APP control instruction

Network Configuration (**Don't support 5G router**)


1. Download and install [Tuya Smart] app

Search for [Tuya Smart] in Apple or Google store or scan following QR code to download and install the app.
Please open the app click " Register " button to create account while using it in the first time,
Log in directly if you already had account.




2. Network Configuration

- (1) Connect controller with power supply.
- (2) Confirm light is flashing quickly (2 flashes per second),
If the light is not in the fast flashing state, the method to enter the fast flashing state is as follows:
 - Power off and on controller 3 times.
- (3) Connect phone with home WiFi network in the 2.4GHz frequency.
- (4) Open homepage of app and click "+" button at the upper right corner of page.
- (5) Click "Lighting" on the left side of page and then click "Light Source (BLE+Wi-Fi)"
- (6) Follow app prompts to complete configuration.

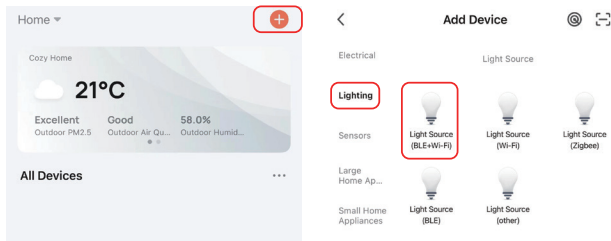

App turn on and off "Do Not Disturb" mode (default activated)


Click the light which need to be set up or group control --- click "More" --- click "Power-on behavior" --- turn on or off

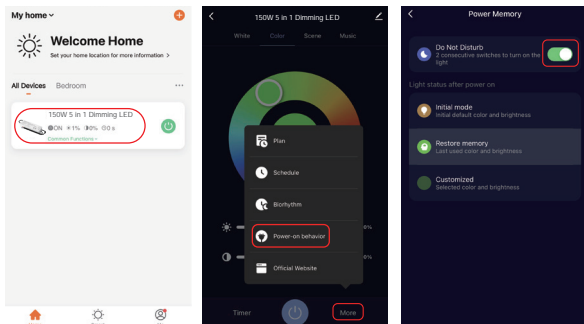

Alexa voice control instruction

Please add device into **[Tuya Smart]** app ([check details in page 9](#)), then start following steps


- 1). Open Alexa App
- 2). Click “More” on the bottom of right corner
- 3). Click “Skills & Games”



- 4). Click “Q” on the top of right corner
- 5). Type into “Smart life” and search




- 6). Click “Smart Life” skill, follow instruction to finish configuration and start voice control




Google Home voice control instruction

Please add device into **[Tuya Smart]** app (check details in page 9), then start following steps


- 1). Open Google Home App
- 2). Click “+” on the top of left corner




- 3). Click “Set up device”



- 4). Click “Works with Google”




- 5). Click “Q” on the top of right corner
- 6). Type into “Smart life” and search
- 7). Click “Smart Life” skill, follow instruction to finish configuration and start voice control






DMX512 LED Transmitter Control (Purchased separately)

Only for RGB+CCT output mode

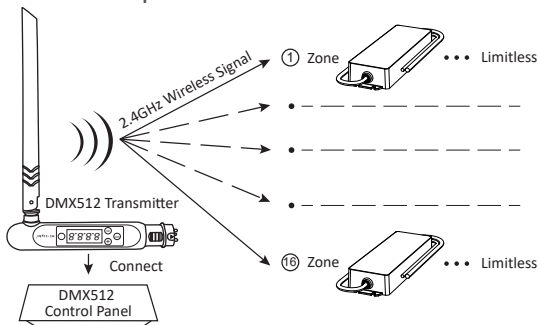

DMX512 LED Transmitter Link/Unlink

- 1 Follow instruction of DMX512 transmitter (FUTD01), Choose the zone for the light by pressing "+" or "-" (e.g. "CH12" means zone 12)



Link

Power off 10 seconds and power on again or turn on light via PUSH switch

Short press "Ⓟ" 3 times within 3 seconds while the light of controller is ON

Link is done once light of controller flashes 3 times slowly

Unlink

Power off 10 seconds and power on again or turn on light via PUSH switch

Short press "Ⓟ" 5 times within 3 seconds while the light of controller is ON

Unlink is done once light of controller flashes 10 times quickly




If the link or unlink failed, please follow the above steps again.


Connect to LED strip diagram



Controller input voltage must be in accordance with the required voltage of LED Strips.

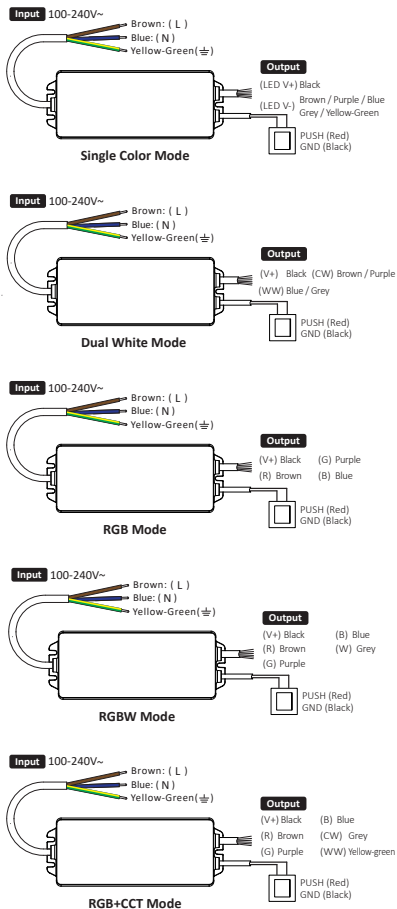

Instruction



Attention

1. Please turn off power supply before installation.
2. Please ensure input voltage to be same as requirements from device.
3. Don't disassemble device if you are not expert, otherwise it will damage it.
4. Please do not use the light in the place with widely range metal area or strong electromagnetic wave nearby, otherwise, the remote distance will be seriously affected.



Made in China